


1RI-C6038BK-U-ZNS

Caster

- **Patented Zero Noise Stem**
- 60mm Black Urethane Caster with soft Polyurethane Wheel Tread
- 38mm Barrel
- Hard & Soft Wheel Available
- Push & Threaded Stem both available.
- In Accordance with BIFMA standards.
- Custom Colour Available

Technical Data

- Wheel Diameter: 60mm
- Hub Diameter: 38mm
- Caster Width: 52mm
- Caster Height 68mm
- Push Stem: 11x22, 11x24, 10x22
- Threaded Stem: 3/8"x18, M8x15, M10x15
- Plate Stem: 37x37, 40x40, 43x43, 54x54
- Static Load: 60KG
- Dynamic Load: 40KG
- daN: 45
- Temperature Resistant: 0°C - 70°C

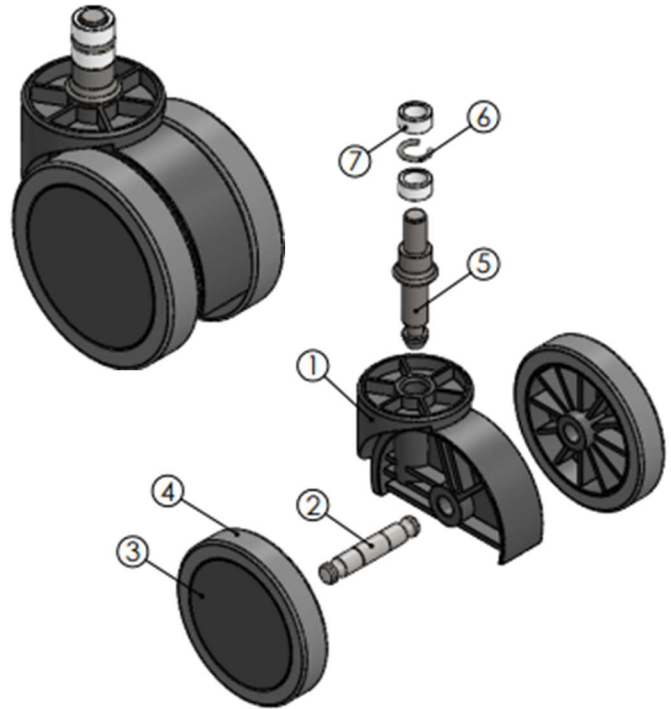

ITEM NO.	PART NUMBER	Raw Material	QTY.
1	Poly 60 HUB	PA6	1
2	CPin	Mild Steel	1
3	Poly 60 Core	PA6	2
4	Poly 60 Tread	TPU	2
5	ZNS Stem	Mild Steel	1
6	Lock Ring	Spring Steel	1
7	ZNS Sleeve	POM	2

